IMPPUMPS®
Intelligent Motor Pumps

Pressure boosting unit

PPT BL

PPT BL 2 - 6 - P2V P2F

PPT	Pressure boosting unit
BL	Pump type
2	The flow rate of one pump
6	Number of impellers
P2V	Number of frequency regulated pumps
P1F	Number of frequency unregulated pumps



USAGE:

- Sanitary water
- Maintaining and increasing the pressure in big systems (irrigation systems)
- Residential buildings
- Health facilities
- Administrative buildings
- Industrial buildings
- Hotels
- & more


PROPERTIES:

- Medium - Sanitary water, pH from 5 to 8
- Working temperature - from 0°C to 120°C
- Ambient temperature - up to 40°C
- Relative humidity - <95%
- Max operating pressure - 1.0 MPa


IMPPUMPS®
Intelligent Motor Pumps


PPT BL X-X-P1V







PPT BL X-X-P2V

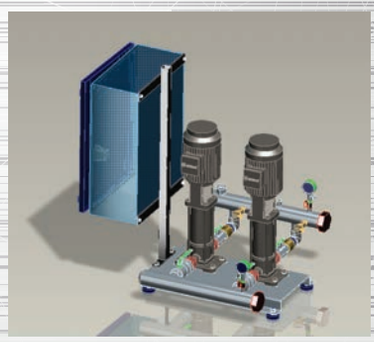

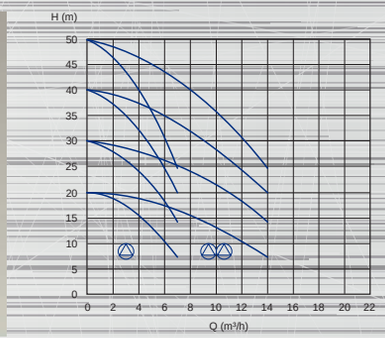

PPT BL X-X-P3V

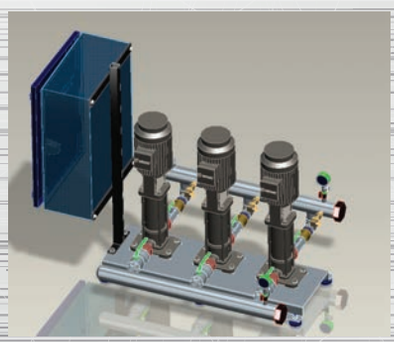

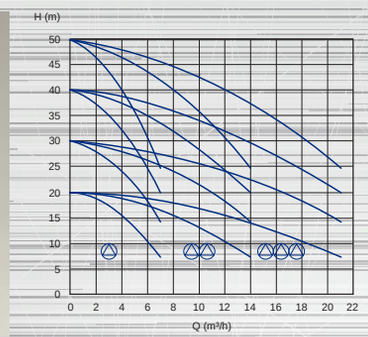

Conformity with standards and regulations:
- EN1717:2001
Protection against pollution of potable water in water installations and general requirements of devices to prevent pollution by back-flow
- DIN 2000
Central drinking water supply - Guidelines regarding requirements for drinking water, planning, construction, operation and maintenance of supply plants
- TrinkwV2001
Ordinance on the quality of water intended for human consumption
- 4MS Initiative - Acceptance of Metallic Materials Used for Products in Contact with Drinking Water – 4MS Common Composition List

RANGE

